

## TRAILER MOUNTED ACCESS PLATFORM



9.50m (31ft 2in) Working Height

3.50m (11ft) Working Outreach

Weight Saving Chassis Design Easily towed on the road and manoeuvred on site

Fully Proportional Hydraulic Controls Designed for maximum operator efficiency

Compact Outrigger Configuration Can be set up in confined spaces


Telescopic Axle Access through single doorway openings




The Nifty 90 is the ideal alternative to ladders and scaffolds. Its compact design allows it to set up in the most confined spaces. The telescopic axle allows it to pass through single doorways. The simple and reliable hydraulic controls make even first time operation straightforward.

## **Safety Features**

- ▶ Pressure sensitive outriggers with interlocks & audible alarm
- Dual controls (platform & base)
- Emergency descent system with hand-pump
- Lock valves on all hydraulic cylinders
- Overrun brake system with spring handbrake (option)
- Harness point
- CE Mark

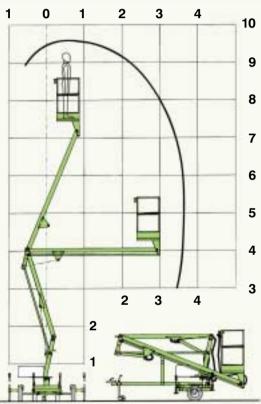

Metres



## Supplied by:



Telescopic axles allow the Nifty 90 to pass through a 0.75m (2ft 6in) wide opening.



Integral harness point on platform for operator safety when working.



The Nifty 90's working outreach facility makes it ideal for working over racking or machinery.

## **Specifications**

Working Height Platform Height	9.50m 7.50m	31ft 2in 24ft 7in
Platform Height	7.50m	24ft 7in
		2411 / 111
Working Outreach	3.50m	11ft 6in
Slew	360°	
Travelling Width	1.50m	4ft 11in
Working Width	2.10m	6ft 11in
Axles Retracted Width	0.75m	2ft 6in
Height Stowed	1.70m	5ft 7in
Overall Length	3.80m	12ft 5in
Weight	595kg	1309lbs
Platform Capacity	120kg	265lbs
Platform Size	0.60m x 0.60m	2ft x 2ft
Control Systems	Fully proportional hydraulic controls	
Power Options	Mains only Battery only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms



Niftylift Ltd

ed Fingle Drive Stonebridge Milton Keynes MK13 0ER England www.niftylift.com e.mail: info@niftylift.com Tel: +44 (0)1908 223456 Fax: +44 (0)1908 312733